





June Tailor, Inc.


Quarter Cut™ Slotted Ruler

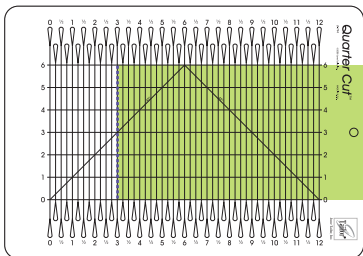

Cut perfect strips.

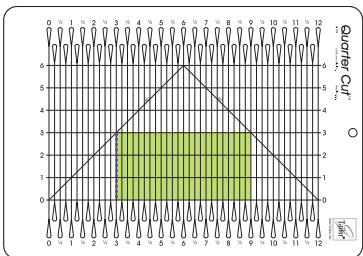


Cut strips into squares.

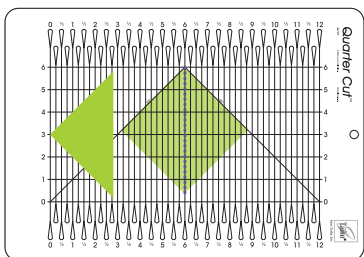


Cut squares into triangles.

- Use with a rotary cutter and mat.
- Cut multiple layers of fabric quickly and accurately.

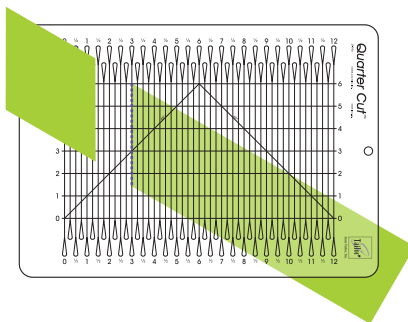

Cut strips into diamonds.

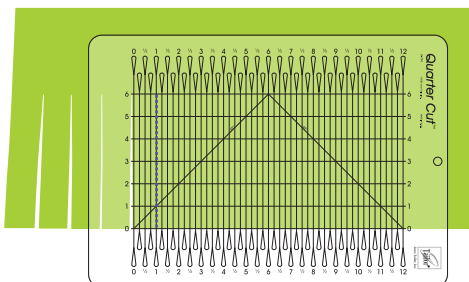

Cut perfect fringe.

Made in U.S.A.



Watch our video
for easy-to-follow
instructions.

June Tailor, Inc.
2861 Highway 175, PO Box 208
Richfield, WI 53076 USA
www.junetailor.com



JT-794


600097 #10:12:17

DIRECTIONS

Helpful Hint: Tilt rotary cutter blade at a slight angle when placing into teardrop shape for easy insertion.


To Cut Strips:

1. Fold fabric selvage to selvage. Fold in 1/2 two more times .
2. Lay Quarter Cut™ over fabric with raw edges extending slightly beyond vertical slot marked "0" and bottom fold of fabric at horizontal line marked "0".
3. To square up raw edge of fabric, insert blade in "0" slot marking and cut.
4. Cut subsequent strips to desired width.

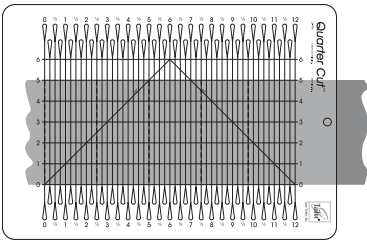

To Cut Triangles:

1. Line up corner of square under 45° markings on Quarter Cut™ .
2. Cut in half using slot marking that runs through center of square.


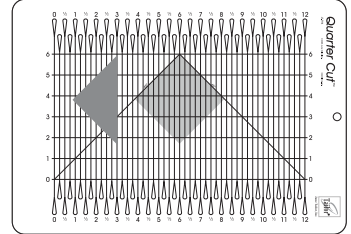


To Cut Diamonds:

1. Line up fabric on either 45° or 60° marking on cutting mat.
2. Align vertical slot openings on Quarter Cut™ with 45° or 60° markings on mat. Cut strips in desired widths.
3. Keeping cut strips intact lift Quarter Cut™ and rotate in clockwise direction until horizontal marked lines on Quarter Cut™ match vertical lines on cutting mat.
4. Cut strips into diamonds, cutting the same width as first set of cuts made.

To Cut Squares:

1. Cut strips to desired width following previous instructions.
2. Keeping strips intact, lift Quarter Cut™ and turn 90°.
3. Cut desired width in opposite direction.

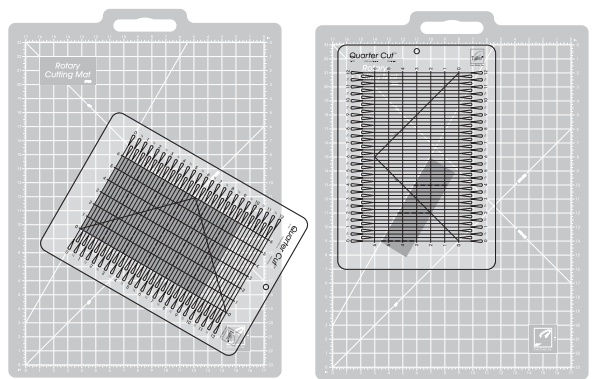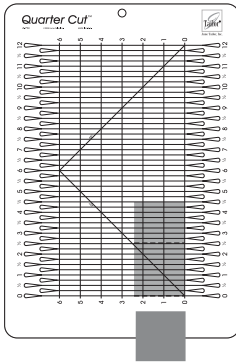

To Cut Hexagons:

1. Cut diamonds using the 60° markings on your rotary cutting mat.
2. Center each diamond horizontally under the number 6 slot on the Quarter Cut™ .
3. Cut half the width of the diamond on each side of the center, number 6, slot opening.

