




June Tailor, Inc.


Shape Cut™ Slotted Ruler




June Tailor, Inc.

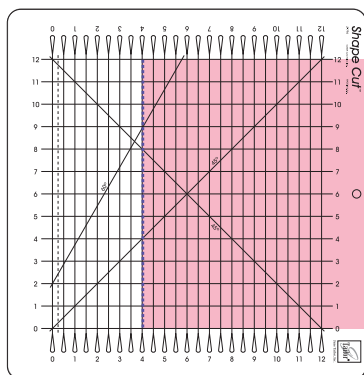

Cut perfect strips.

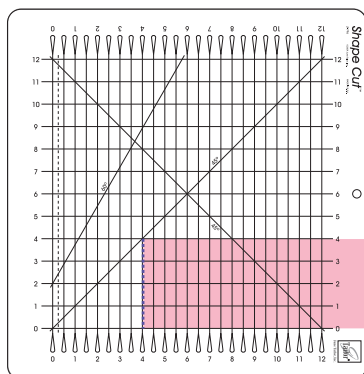


Cut strips into squares.

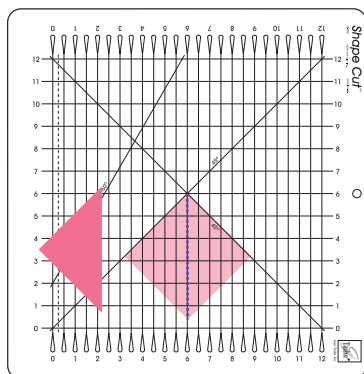


Cut squares into triangles.

- Use with a rotary cutter and mat.
- Cut multiple layers of fabric quickly and accurately.

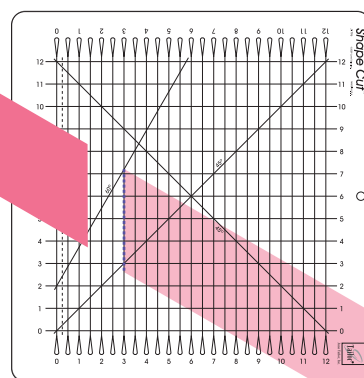

Cut strips into diamonds.

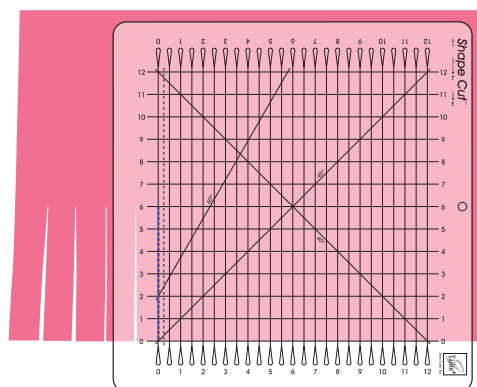

Cut perfect fringe.

Shape Cut™ Slotted Ruler

June Tailor, Inc.
2861 Highway 175, PO Box 208
Richfield, WI 53076 USA
www.junetailor.com

Watch our video
for easy-to-follow
instructions.



Made in U.S.A.



7 30976 07960 0

JT-796

600056 #3:01/17




MADE IN USA

1 pc/pz

DIRECTIONS


To Cut Strips:

1. Fold fabric selvage to selvage.
2. Fold again in same direction.
3. Lay Shape Cut™ over fabric, with raw edges extending slightly beyond vertical slot marked "0" and bottom fold of fabric at horizontal line marked "0".
4. To square up raw edge of fabric, insert blade in "0" slot marking and cut.
5. Cut subsequent strips to desired width.

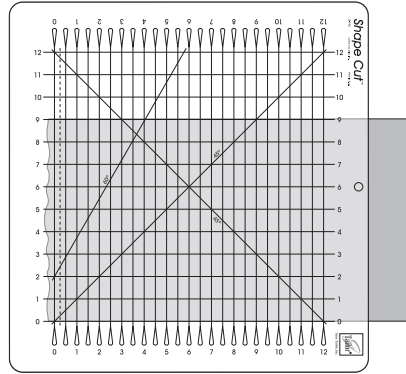


To Cut Squares:

1. Cut strips in desired width following previous instructions.
2. Keeping cut strips intact, lift Shape Cut™ and turn 90°.
3. Cut desired width in opposite direction.

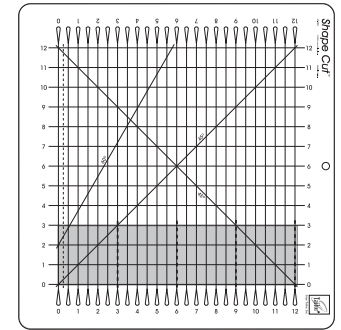


To Cut Triangles:

1. Line up corner of square under 45° markings on Shape Cut™.
2. Cut in half using slot marking that runs through center of square.

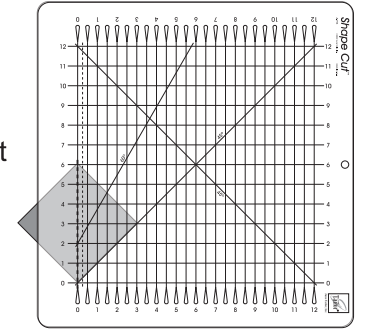


To Cut Bias Strips:

1. Fold fabric in half diagonally.
2. Line up fold with "0" horizontal marking on Shape Cut™.
3. Cut strips in desired widths.

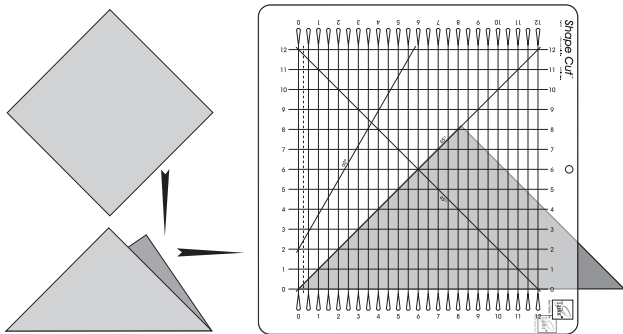


To Cut Diamonds:

1. Line up fabric on either 45° or 60° marking on cutting mat.
2. Align vertical slot openings on Shape Cut™ with 45° or 60° marking on mat. Cut strips in desired width.
3. Keeping cut strips intact, lift Shape Cut™ and rotate in clockwise direction until horizontal marked lines on Shape Cut™ match vertical lines on cutting mat.
4. Cut strips in desired width to form diamonds.

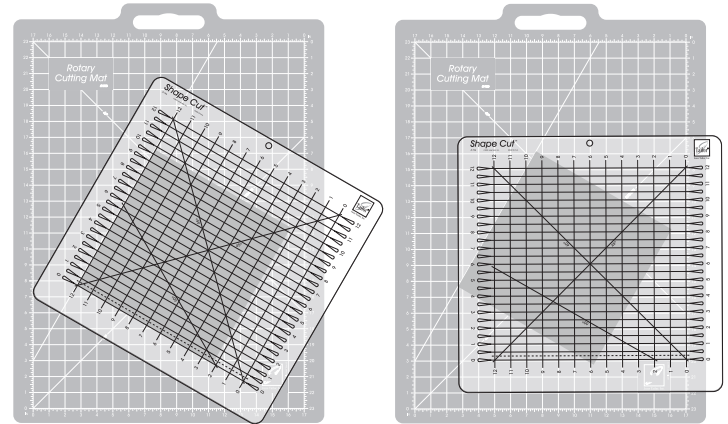

To Cut Chevrons:

1. Fan fold fabric in desired width.
2. Line up folded fabric on either 45° or 60° marking on cutting mat.
3. Cut desired width.

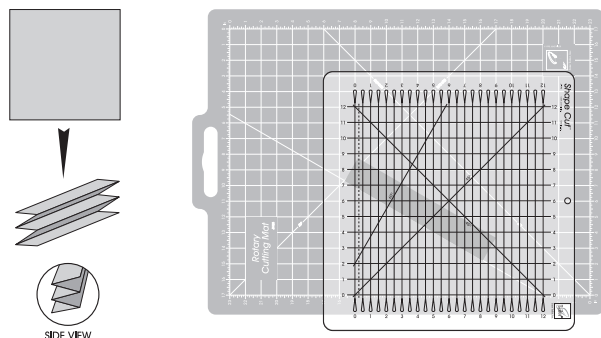

To Cut Hexagons:

1. Cut diamonds using the 60° marking on your rotary cutting mat.
2. Center each diamond horizontally under the number 6 slot on the Shape Cut™.
3. Cut half the width of the diamond on each side of the center, number 6, slot opening.

